

AMERI- CANA™

& CANADIANA *ROOFING AND SIDING PANELS*



ideal roofing
Company Limited, Manufacturers

SOLID STEEL STRENGTH



*EPA-- USA




Canadian Edition

AMERI-CANA™ PANEL


SUPERIOR STRENGTH AND VERSATILITY

Ideal Roofing's Ameri-Cana roofing and siding panel offers superior strength with its strong **80,000 psi full-hard steel core** and its 5 specially-designed 3/4"-high ribs spaced every 9 inches. Superior strength means savings on wood or steel purlins for the builder. Please consult the following load tables.

"OUR RIBS ARE BETTER!"



The ribs on the Ameri-Cana panel are reinforced to better accommodate fasteners. With its symmetrical pattern and ribs with steeper angles, the Ameri-Cana panel is considered the ultimate roofing or siding panel for agricultural, commercial or industrial buildings as well as for residential roofing applications.

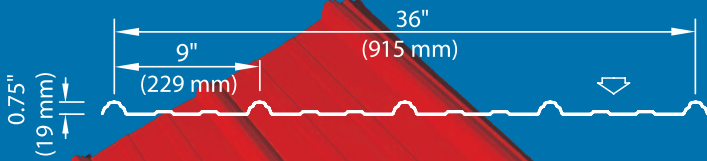


WEATHERTIGHT OVERLAP

Ideal Roofing's Ameri-Cana panel offers maximum protection against leakage with its built-in anti-siphon groove to counter water infiltration resulting from capillary action. This feature makes the Ameri-Cana panel "ideal" for use as a roofing sheet for long and low rafters with a roof pitch as low as 3/12.

UNIFORMLY DISTRIBUTED LOADS (LBS/FT²) FOR TRIPLE SPAN CONDITION


(Tested Under ASTM E72-05)

	18"	24"	30"	36"	42"	48"
29 gauge (.016")	304	171	95	67	49	38
26 gauge (.021")	423	237	135	87	63	48

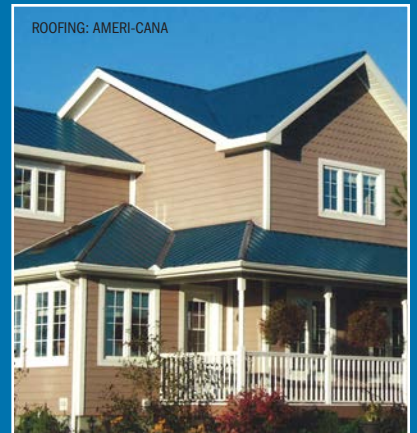

4 COATS OF PROTECTION FOR LONGER LIFE

- 1 ALUMINUM-ZINC ALLOY (GALVALUME AZM150)
- 2 METAL OXIDE PRETREATMENT
- 3 HIGH PERFORMANCE PRIMER
- 4 PERSPECTRA PLUS SERIES™ / WEATHER XL™

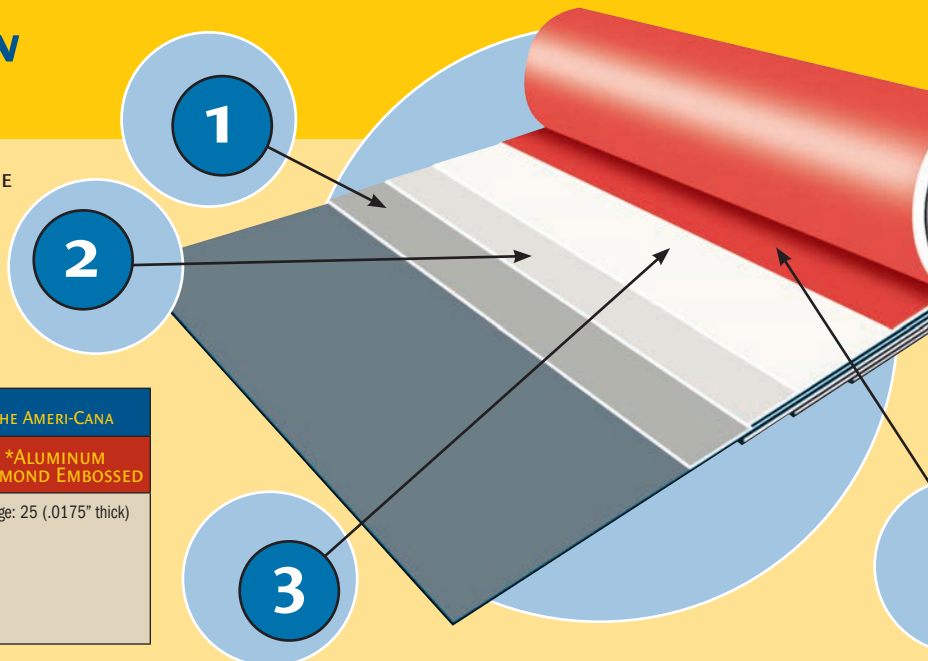

40 YEAR LIMITED WARRANTY


YOUR CHOICE OF MATERIAL *APPLICABLE ONLY ON THE AMERI-CANA

GALVANIZED STEEL (MILL FINISH)	GALVALUME PLUS (MILL FINISH)	PRE-PAINTED GALVALUME STEEL	*ALUMINUM DIAMOND EMBOSSED
ASTM-A653 SS Grade 80, Z275 (G-90); Gauges: 29 (.016" thick) and 26 (.021" thick)	ASTM-A792 SS Grade 80, AZM165; Gauge: 29 (.016" thick)	Perspectra PLUS Series™ / Weather XL™: see colour chart; ASTM-A792 SS Grade 80, AZM150; Gauges: 29 (.016" thick) and 26 (.021" thick)	Gauge: 25 (.0175" thick)

CANADIANA SIDING PANEL


SUPERIOR STRENGTH STEEL SIDING

The Canadiana panel is destined to become the industry's most versatile lightweight steel siding panel with its strong full-hard steel core 80,000 psi and its seven 5/8"-high ribs spaced every 6 inches.



"... COVERS A WIDER AREA"

Economically formed from a 41-in.-wide steel coil to a final 36-in. ribbed sheet, this panel covers a wider area than other siding panels. Consider the aesthetic and structural qualities of our Canadiana steel siding panel for exterior and interior use on agricultural, commercial and industrial buildings.

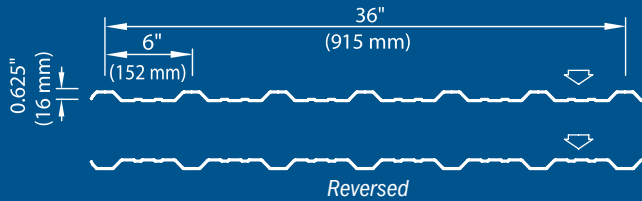

UNIFORMLY DISTRIBUTED LOADS (LBS/FT²) FOR TRIPLE SPAN CONDITION

(Theoretical Data)

	18"	24"	30"	36"	42"	48"
29 gauge (.016")	213	120	77	53	36	24
26 gauge (.021")	321	180	115	80	51	34

Normal Occupancy

	18"	24"	30"	36"	42"	48"
29 gauge (.016")	266	150	97	66	45	30
26 gauge (.021")	401	225	144	100	64	43

Low Human Occupancy (Farm Buildings)



TIME AND MONEY SAVERS


Both the Ameri-Cana and Canadiana panels save you time and money! Time because you install wider sheets covering 36-inches that are custom-cut to the inch in lengths measuring up to 40 feet, for your convenience. You save money because the Ameri-Cana and Canadiana panels are made from a 41-in.-wide flat steel sheet with considerably less metal waste than any other high-rib profile.

24 ATTRACTIVE COLOURS TO ENHANCE YOUR BUILDINGS

Colours not exactly as shown. See colour card.

Dark Brown ID 8229	Forest Green ID 8307	Slate Blue ID 8260	Regent Grey ID 8730	Antique Linen ID 8696	Pebble Khaki ID 8129
Heron Blue ID 8330	Tile Red ID 8259	Charcoal ID 8306	Royal Blue ID 8790	Bright Red ID 8386	Graphite Grey ID 60035
Tan ID 8315	White ID 8317	Burgundy ID 8011	Coffee ID 8326	Medium Green ID 8329	Jet Black ID 60039
Red ID 8250	Stone Grey ID 8305	Bone White ID 8273	Polar White ID 8783	Black ID 8262	Sepia Brown ID 60041

FLASHINGS, TRIMS, FASTENERS AND ACCESSORIES

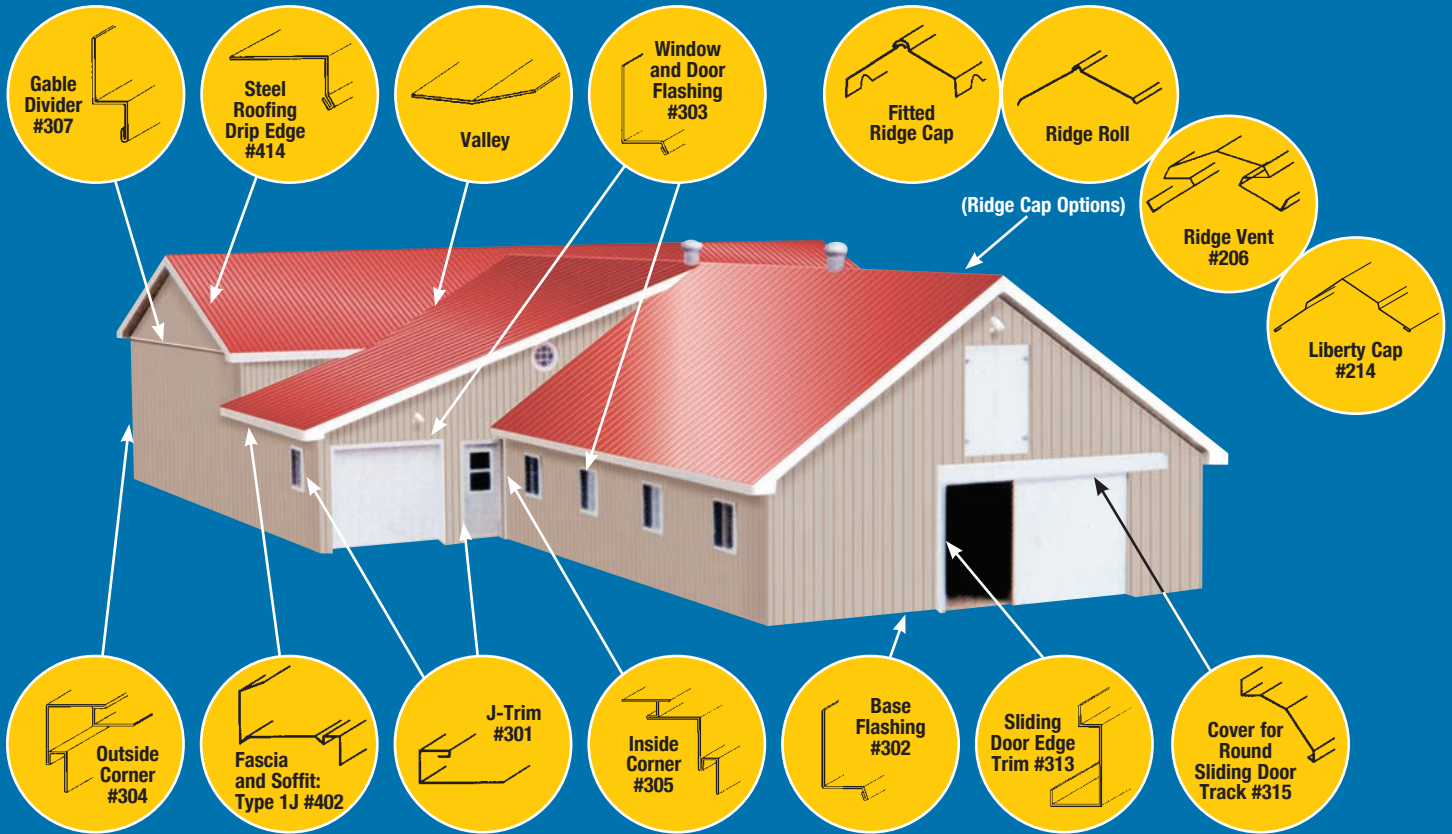

Ideal Guard	Ridge Roll, 10' lengths	Valley 18", 24", 36"	Closure Strip Eave Ridge	Ridge Vent, 10' lengths	Fitted Ridge Cap, 6' lengths	Roll Valley Coils, 50' lengths	SNOW DIAMOND
Fitted Wall Flashing	"Z" Bar	"U" Channel	Omega Bar	Touch-up paint PAINT	Screw with neoprene washer	#14 Self-drilling screw with 7/16" nylon head	#12-#14 Self-drilling screw with neoprene washer

To add the finishing touch, Ideal Roofing fabricates all its flashing and trims in all colours and materials.

UL 580 (Class 90), Wind Uplift Resistance (check our website for installation details).



Head Office
1418 Michael Street
Ottawa, Ontario K1B 3R2
www.idealroofing.com

Tel.: 613.746.3206
Toll Free: 1.800.267.0860
Fax: 613.746.0445
info@idealroofing.ca

SHERWIN-WILLIAMS.
Coil Coatings